
Visor Assembly Instructions

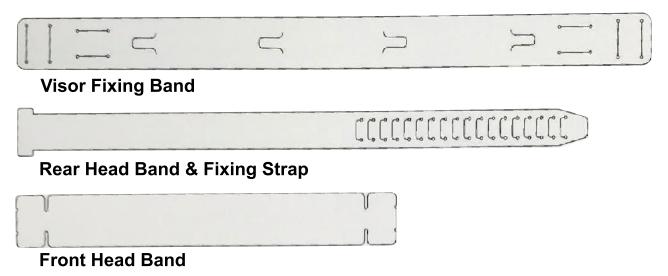

The Visor and Fixing band components are supplied with protective covers, these need to be removed prior to assembly.

The tabs on the front head band should be inserted into the horizontal slots on the visor fixing band as shown in the image. This will form a natural curve in the visor fixing band keeping it away from the face.

The rear head band & fixing strap should be fed all the way through one side of the vertical slots either side of the visor fixing band. This can then be fed through the other side of the visor fixing band and adjusted according to head size. The appropriate tab on the fixing strap can then be used to secure the strap from being pulled out.

The visor can be fitted to the pull out tabs on the visor fixing band and the finished protective visor will look like the final image.





